

Omni-ID® Pipe

The Omni-ID Pipe tag is a high impact, limited life RFID tag designed specifically to address the rigors of pipe and cylinder storage and transport. The Pipe tag is ideally suited for track and trace of difficult-to-tag cylindrical assets that are subject to significant impact. The Pipe tag is a long-range, regionally-tuned tag with a removable strap attachment mechanism that minimizes the complexity of tagging pipes.


Applications

The Omni-ID Pipe was specifically designed for pipe and cylinder storage and management. Pipe tags are ideal for:

- ▶ Drill Pipe
- ▶ Bolsters
- ▶ Large cylindrical assets

Physical Specifications

Encasement	Polypropylene structure and synthetic label
Size (mm)	79 x 74 x 20.0 (+/- 1.0)
Size (in)	3.1 x 2.9 x .79 (+/-0.04)
Weight (g)	44

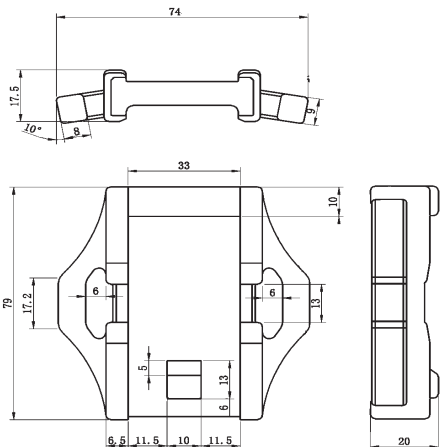

Dimensions stated in mm

RF Specifications


Protocol	EPC Class 1 Gen2V2
Frequency Range (MHz)	902 - 928 (US), 866 - 868 (EU)
Read Range (Fixed reader) ¹	Up to 15.0m (49.2ft)
Read Range (Handheld reader) ¹	Up to 7.5m (24.7ft)
Material Compatibility	Optimized for Metal
IC Type (chip)	Alien H3
Memory ²	EPC - 96bits User - 512bits UTID - 64bits

1. Quoted performance achieved using standard testing methodology. Read range will vary with reader hardware and output power.

2. EPC and User memory are reprogrammable, UTID is locked at point of manufacture.

Radiation Pattern

On Pipe

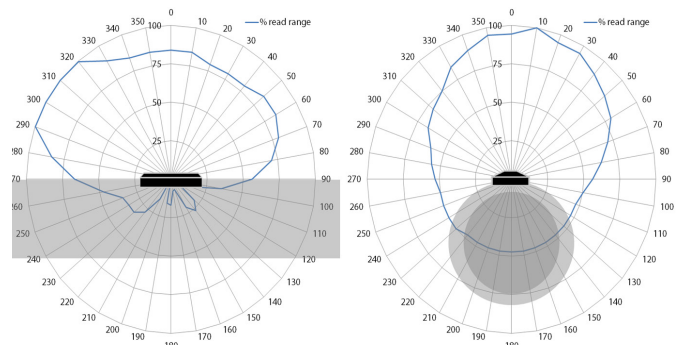

Related Products and Services

- ▶ **Omni-ID Curv** - Small form factor, high impact, on-metal RFID tag for adhesive attachment to industrial assets.
- ▶ **Omni-ID Max HD**- Long range, high durability RFID tag product for heavy industry applications involving metal.
- ▶ **Omni-ID 360** - Extremely durable, high performance tether tag with 360° read angle for heavy industry applications.
- ▶ **Service Bureau** - Omni-ID offers a full service bureau for printing and pre-encoding Omni-ID tags at point of manufacture.



Environmental Specifications

Operating Temperature	-40 ° to +65 °C
Long term Max Temperature ¹ exposure - (days,weeks,years)	+65 °C
Short term Max Temperature ¹ exposure - (minutes,hours)	+85 °C
IP Rating	IP65
Shock and Vibration	MIL STD 810-G
Impact	>25kg from 1m
Attachment	Strap (not supplied with product)
Certifications	RoHS approved CE approved ATEX/IECEX certified (option) US&Canada (C1D1/D2) certified (option)
Warranty	1 year



¹ Excludes adhesive options, consult adhesive data sheets for recommended temperature ratings.

Ordering Information

Order code	030 - EU, US
Order options	:303 (Customization) :304 (ATEX/IECEX certified) :307 (US&Canada (C1D1/D2) certified) :701 (Standard Service Bureau)

Omni-ID office locations: **US | UK | China | India | Germany**
For product or technology inquiries email: sales@omni-id.com